MAXELL

AUFINE TYRE CO.,LIMITED

+86-532-88960296 +86-532-88962532

info@aufine.com www.maxelltire.com

MAXELL TIRE PRODUCT CATALOGUE



PATTERN SELECTION GUIDE

Long Haul



HA1 HA1++ HA2

HA3 HA5 HA108

HA11 HA13 HT1

HA9 HD2 HT3

AS1

Regional



LA1 LA3 LD2 LA266

LD2++ LD3 LD5 LD6

LD7 LD8 LD23 LD25

LD26 LD9 LD117 LD21

LT1 LT258 LT288 MAE8

LA25

Mix



MA1 MA26 MA3 MA31

MA32 MA321 MA321++ MD2


MA358 MA5 MD6++ MIX D8

MD818 MD301 MD306 MD307

MD309 MD363 MD318 MD668

MD9 MRY2 MRY8

Off Road

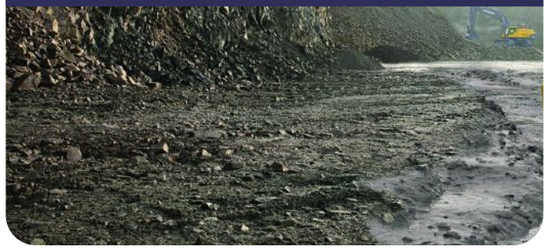

KD2 KD3 KD5

KD65 KD68

Urban Bus

UA82 UA89


Winter

WD2 WD7

MAXELL

MAXELL TYRE TECHNOLOGY

4BS
FOUR BELTS STRUCTURE
-Enhanced even wear
-Longer mileage
-Better handling and more comfortable

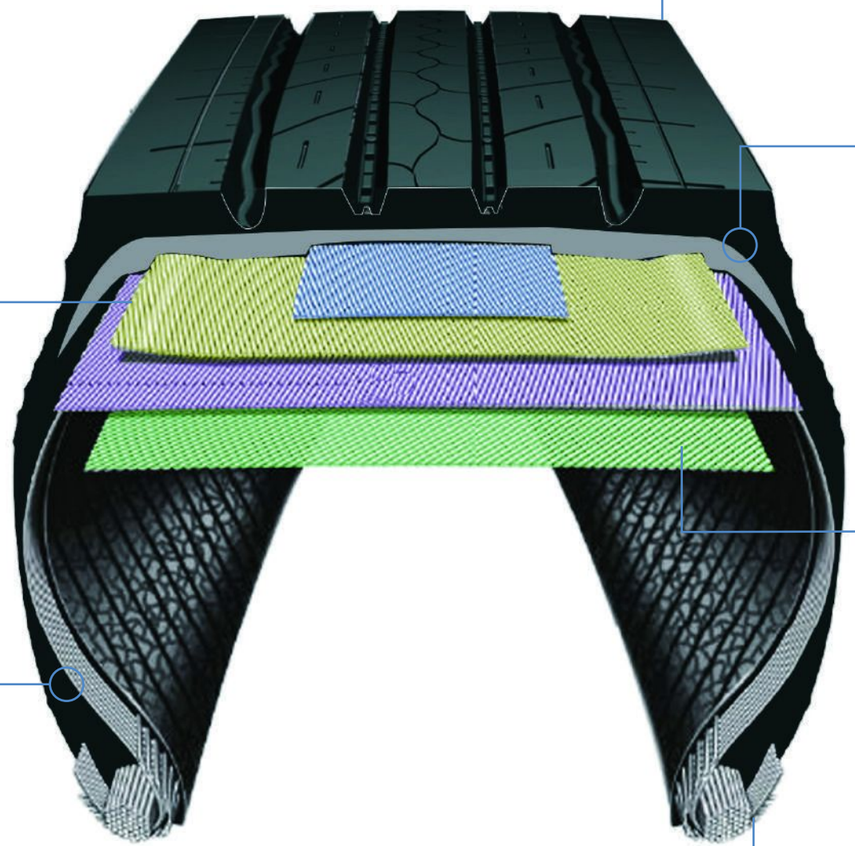

UT
ULTRA-STRENGTH STEEL WIRE
-100% from BEKAERT
-Regroovable
-Stronger load capability
-Longer mileage

WTW
WIDER TREAD WIDTH
-Increased tire contact area
-Optimized pressure distribution
-Higher mileage
-Better handling
-Even wear

DLTC
DUAL LAYER TREAD COMPOUND
-High silica formulation compound
-Premium quality rubber from Malaysia and Thailand
-Carbon black from CABOT
-High mileage
-Low heat generation for better rolling resistance and integrity
-Better resistance at low temperature
-Even wear

FRC
FULLY RUBBERIZED CORD FOR BELT
-Oxidation prevention
-Long casing life


BWC
BEAD WRAPPED CHAFER
-Greater resistance
-Better retreadability

LONG HAUL


SUPER HA1







- The new product image of bionic design gives good visual impact.
- Increased tread width for a correct distribution of footprint contact pressure, able to improve even wear and ensure high mileage.



- Optimized pattern pitch distribution, especially with stepped design, provides stronger handling wet grip and low-noise performance.



- The special shoulder contour ensures optimal even wear and higher mileage.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
6.50R16LT	12	F	110/105	L	76	14.0	11.0	5.50F	2340	97	1060	670	2040	97	925	670
295/80R22.5	20	L	154/150 (152/148)	L(M)	75	20.8	16.5	9.00	8270	123	3750	850	7390	123	3350	850
315/80R22.5	22	L	160/157 (157/154)	J(K)	62	19.5	15.5	9.00	9920	138	4500	950	9090	138	4125	950
385/55R22.5	24	N	164(162)	J (K)	62	19.5	15.5	12.25	11000	138	5000	950	—	—	—	—
385/65R22.5	24	N	164(162)	J (K)	62	20.8	16.5	11.75	11000	138	5000	950	—	—	—	—
325/95R24	22	M	162/160	K	68	18.9	15.0	9.00	10500	120	4750	830	9920	120	4000	830

SUPER HA1++





- The new product image of bionic design gives good visual impact.
- Increased tread width for a correct distribution of footprint contact pressure, able to improve even wear and ensure high mileage.
- Optimized pattern pitch distribution, especially with stepped design, provides stronger handling wet grip and low-noise performance.
- The special shoulder contour ensures optimal even wear and higher mileage.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
315/80R22.5	22	L	160/157 (157/154)	J(K)	62	19.5	15.5	9.00	9920	138	4500	950	9090	138	4125	950

SUPER HA2





- Four vertical straight grooves design improves the handling and braking ability on the wet surface.
- ATLM Technology reduces the lateral movement of tire, which improves the tire mileage.
- The central transversal groove design allows a correct distribution of footprint contact pressure and ensures optimal.
- Widened shoulder design promotes even wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
315/70R22.5	18	J	156/150 (154/150)	L(M)	75	19.5	15.5	9.00	8820	130	4000	900	7390	130	3350	900




ECOMAX HA3





- Unique pattern design, more beautiful and generous.



- The design of four four straight grooves grooves provides excellent handling performance, effectively prevents stones from being trapped, and improves the cleaning ability of the tire itself.



- The design of wide driving surface and deep groove combined with the tread adopts ultra-high wear-resistant formula, endowing the product with super wear-resistant.
- With a new profile design, the tire contact pressure distribution is more uniform, and the anti-eccentric wear performance is better.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/80R22.5	20	L	154/149	L	75	20.8	16.5	9.00	8270	123	3750	850	7160	123	3250	850
315/80R22.5	22	M	160/157 (157/154)	J(K)	62	19.5	15.5	9.00	9920	138	4500	950	9090	138	4125	950

SUPER HA5





- Four longitudinal grooves design provides excellent handling performance and is more suitable for long-distance transportation.
- Wider tread design and the application of high wear-resistant formula provide excellent tyre service life.
- High-strength steel wire and thickened sidewall design ensure safer tyre use.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	18	J	149/146	L	75	19.5	15.5	8.25	7160	135	3250	930	6610	135	3000	930
215/75R17.5	18	J	135/133	J	62	18.3	14.5	6.00	4805	123	2180	850	4540	123	2060	850
235/75R22.5	18	J	143/141	J	62	17.1	13.6	6.75	6005	127	2725	875	5675	127	2575	875
275/70R22.5	18	J	148/145	L	75	20.7	16.4	8.25	6945	130	3150	900	6395	130	2900	900
275/80R22.5	18	J	149/146	M	81	19.0	15.1	8.25	7160	130	3250	900	6610	130	3000	900
295/80R22.5	18	J	152/149	M	81	17.8	14.1	9.00	7830	130	3550	900	7160	130	3250	900

SUPER HA9





- Wider tread design combined with a unique laser-line pattern for a more aesthetic tire appearance.
- Four longitudinal groove designs provide excellent handling and comfort performance.
- The special stone ejector design at the bottom of the grooves ensures tire self-cleaning performance, extending tire lifespan.
- The shoulder features small grooves with steel plates, aiding in improving tire heat dissipation performance and reducing the occurrence of bulging issues.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	18	J	149/146	L	75	19.5	15.5	8.25	7160	135	3250	930	6610	135	3000	930
11R24.5	18	J	152/149	L	75	19.5	15.5	8.25	7830	135	3550	930	7160	135	3250	930
255/70R22.5	18	J	142/140	K	68	17.6	14.0	7.50	5840	135	2650	930	5510	135	2500	930
295/75R22.5	18	J	149/146	L	75	18.9	15.0	9.00	7160	135	3250	930	6610	135	3000	930

SUPER HA108





- The widened tread design, combined with the application of a high-wear-resistant formula, provides enhanced wear resistance.



- The new carcass profile and reinforced frame material make the tire safer to use.
- The application of finite element simulation optimizes the ground contact footprint and effectively prevents uneven wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
315/70R22.5	20	L	156/150	L	75	18.9	15.0	9.00	8820	130	4000	900	7390	130	3350	900

SUPER HA11





- Robust longitudinal ribs grant wet grip, road holding and steering precision, shorter braking distance.
- Stress relief sipes fight the initiation and spread of irregular wear on the main ribs by absorbing rib edge stresses within the footprint.
- Wider shoulder design for extra protection from curb damage.
- The special shoulder contour ensures optimal even wear and higher mileage.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	16	H	148/145	M	81	19.5	15.5	8.25	6940	123	3150	850	6395	123	2900	850
11R24.5	16	H	149/146	M	81	18.4	14.6	8.25	7160	120	3250	830	6610	120	3000	830
215/75R17.5	16	H	135/133	J	62	15.2	12.1	6.00	4805	125	2180	865	4540	125	2060	865
235/75R17.5	18	J	143/141	J	62	15.2	12.1	6.75	6005	125	2725	865	5675	125	2575	865
255/70R22.5	16	H	140/137	L	75	16.5	13.1	7.50	5510	120	2500	830	5070	120	2300	830

SUPER HA13





- Wider tread design and better wear resistance compound provide longer mileage and excellent durability.
- The characteristic groove design reinforces stability and rapid drainage.
- Longitudinal ribs design provides excellent handling performance.
- Special shoulder tread contour design allows a correct distribution of footprint contact pressure and ensures optimal even wear and higher pressure.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
9.5R17.5	18	J	143/141	J	62	17.1	13.6	6.75	6005	127	2725	875	5675	127	2575	875
275/70R22.5	16	H	148/145	L	75	19.0	15.1	8.25	6945	130	3150	900	6395	130	2900	900

SUPER HT1



- Innovative tread design with circumferential waterdrop sipes below the three central tread grooves, ensures excellent grip and stability on both wet and dry surfaces.
- Increased running surface provides better ground contact area for higher mileage.
- Zigzag groove designed to deliver great lateral holding as well as high tear resistance.
- Widened shoulder prevents irregular shoulder wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
385/65R22.5	24	N	164 (162)	J (K)	62	17.0	13.5	11.75	11000	138	5000	950	——	——	——	——

SUPER AS1



- Optimize tread grooves.The zigzag groove design helps prevent stones from being trapped, extending the tire's lifespan.
- The 3D sipe design ensures excellent traction on both dry and wet surfaces.
- The widened tread design enhances stability during driving.
- The connecting ribs between the tread blocks help control their movement, reduce rolling resistance, and ensure even wear

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/75R22.5	18	J	149/146	K	68	26.4	21.0	9.00	7160	135	3250	930	6610	135	3000	930

SUPER HD2



- Wider tread design results in a more even distribution of forces on the tire, thereby enhancing tire durability.
- Effectively increasing tire saturation, enlarging the tire's effective contact area with the ground, and further enhancing tire mileage.
- A large-block tread design enhances tire traction and braking performance.
- Adopting a special tread compound design to effectively extend tire lifespan.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	18	J	149/146	L	75	28.9	23.0	8.25	7160	135	3250	930	6610	135	3000	930
11R24.5	18	J	152/149	L	75	28.9	23.0	8.25	7830	135	3550	930	7160	135	3250	930
295/75R22.5	18	J	149/146	L	75	28.9	23.0	9.00	7160	135	3250	930	6610	135	3000	930

SUPER HT3




- Wider tread design ensures more even tire force distribution, increasing tire mileage.
- Transverse steel plate design on the tread enhances tire's wet skid resistance.
- Shoulder relief groove design balances tire pressure distribution, prolonging tire lifespan.
- Stone ejector design at the bottom of the tread grooves ensures tire self-cleaning performance, enhancing tire durability.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/75R22.5	18	J	149/146	L	75	13.2	10.5	9.00	7160	135	3250	930	6610	135	3000	930



REGIONAL

SUPER LA1





- Increased tread width promotes mileage.
- 4 grooves combined with wave and zig-zag shape grant road holding and steering precision.
- Special transversal sipes promote wet grip and shorter braking distance.
- Ejectors at the bottom of grooves prevent stones trapping thus ensuring better durability.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
225/80R17.5	16	H	123/122	L	75	19.5	15.5	6.75	3415	102	1550	700	3305	102	1500	700

SUPER LA3





- Robust tread pattern design improves cut resistance and durability.
- Tread width and groove depth enhance robustness and longer mileage.
- The tough ties between blocks provide powerful traction in on and off road services.
- Optimized shoulder design extends tread life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
9.5R17.5	18	J	143/141	L	75	18.9	15.0	6.75	6005	127	2725	875	5675	127	2575	875
265/70R19.5	20	L	146/144	K	68	20.8	16.5	7.50	6610	135	3000	930	6175	135	2800	930
10.00R20	18	J	149/146	K	68	20.8	16.5	7.50	7160	120	3250	830	6610	120	3000	830
11.00R20	18	J	152/149	K	68	20.8	16.5	8.00	7830	135	3550	930	7160	135	3250	930

SUPER LA25





- The reasonable design of groove corners results in outstanding partial wear resistance performance.
- The wave-shaped groove wall design effectively keeps tire tread from clamping the stone.
- The high abrasion resistance formula design ensures that tires last a long wear life on good roads with a fixed load.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
245/70R17.5	18	J	143/141	J	62	17.1	13.6	7.50	6005	127	2725	875	5675	127	2575	875
11R22.5	18	J	149/146	L	75	19.0	15.1	8.25	7160	135	3250	930	6610	135	3000	930

SUPER LA266





- The three-line zigzag pattern groove design, combined with the tread steel sheet design, provides superior grip performance.
- The semi-open shoulder pattern design improves the grip of the tire and also reduces the heat generation of the shoulder, reducing the occurrence of shoulder void problems.
- The design of the zigzagging corner pattern groove wall can effectively prevent the tread from trapping stones, and has strong applicability to road conditions.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12R22.5	18	J	152/149	L	75	18.4	14.6	9.00	7830	135	3550	930	7160	135	3250	930


SUPER LD2








- Directional wide pattern with deeper groove design effectively improves high mileage, uniform wear and better traction.
- Optimized distribution of footprint contact pressure, able to improve even wear and ensure high mileage.




- Special 3D sipes in tread block provides enhanced grip and traction performance in dry and wet conditions.



- Double-wave and raindrop sipes design ensures strong traction on wet road surface.
- Pump sipes on block provides greater resistance to accidental damage.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
275/80R22.5	18	J	149/146	M	81	25.8	20.5	8.25	7160	130	3250	900	6610	130	3000	900
295/80R22.5	20	L	154/150 (152/148)	L(M)	75	25.8	20.5	9.00	8270	123	3750	850	7390	123	3350	850
315/70R22.5	20	L	156/150 (154/150)	L(M)	75	25.2	20	9.00	8820	130	4000	900	7390	130	3350	900
315/80R22.5	22	M	160/157 (154/150)	J(K)	62	27.7	22.0	9.00	9920	138	4500	950	9090	138	4125	950

SUPER LD2+





- Directional wide pattern with deeper groove design effectively improves high mileage, uniform wear and better traction.
- Optimized distribution of footprint contact pressure, able to improve even wear and ensure high mileage.
- Special open shoulder design provides outstanding traction and promotes even wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/80R22.5	20	L	154/150 (152/148)	L(M)	75	25.8	20.5	9.00	8270	123	3750	850	7390	123	3350	850

SUPER LD2++






- Reinforced bead structure with stronger load-bearing capacity.
- Optimized distribution of footprint contact pressure, able to improve even wear and ensure high mileage.
- Special 3D sipes in tread block provides enhanced grip and traction performance in dry and wet conditions.
- Double-wave and raindrop sipes design ensures strong traction on wet road surface.
- Pump sipes on block provides greater resistance to accidental damage.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
315/80R22.5	22	M	160/157 (154/150)	J(K)	62	27.7	22.0	9.00	9920	138	4500	950	9090	138	4125	950

SUPER LD3





- Special tread pattern with completely new tread block pitch sequence guarantees high mileage, low rolling resistance, uniform wear and better traction.
- Increased tread width and groove depth to enhance mileage.
- Special open shoulder design provides outstanding traction and promotes even wear.
- Transversal grooves with optimized geometry offer excellent even wear and easy stone ejection.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12R22.5	18	J	152/149	L	75	28.0	22.2	9.00	7830	135	3550	930	7160	135	3250	930
11R22.5	18	J	149/146	L	75	25.7	20.4	8.25	7160	135	3250	930	6610	135	3000	930

ECOMAX LD6





- New transverse pattern design provides strong brake and traction ability.
- Optimized contour design makes the tread force more uniform and effectively improves the wear resistance of the tyre.
- High-strength steel wire and thickened sidewall design ensure safer tyre use.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/80R22.5	20	L	154/149	L	75	25.8	20.5	9.00	8270	123	3750	850	7160	123	3250	850
315/70R22.5	20	L	156/150 (154/150)	L(M)	75	25.2	20	9.00	8820	130	4000	900	7390	130	3350	900
315/80R22.5	22	M	160/157 (157/154)	J(K)	62	27.7	22.0	9.00	9920	138	4500	950	9090	138	4125	950

SUPER LD5





- The wide tread combined with high saturation pattern design can effectively improve the wear resistance of the tire.
- During use, the 3D pattern design can not only produce a self-locking effect in pattern, but also improves the rigidity of the tire tread and effectively improves the tire's anti-wet skid performance.
- Optimize the distribution of ground pressure, effectively prevent abnormal wear, and further increase the mileage of tires.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/80R22.5	20	L	154/149	L	75	25.2	20	9.00	8270	123	3750	850	7160	123	3250	850

SUPER LD7






- The tire bar between blocks is designed to enhance the overall rigidity of the tire and provide longer mileage.
- The design of the horizontal sipes grant wet grip and ensure the safety of driving.
- Special open shoulder design provides outstanding traction and grip ability.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
315/70R22.5	18	J	154/152 (152/148)	L(M)	75	26.0	20.6	9.00	8270	130	3750	900	7610	130	3450	900

SUPER LD8






- The tread design has been widened by 4% compared to the previous generation of products, and wear resistance has been improved by 10%.
- The tire features a high-density tread block design in the center and a high-strength belt layer, which enhances the tread rigidity and further reduces tread deformation, thereby improving the tire's wear resistance.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
315/80R22.5	22	M	160/157	K	62	26.4	21.0	9.00	9920	138	4500	950	9090	138	4125	950

SUPER LD21







- Big block pattern design delivers extended treadlife, superb traction and exceptional durability.
- Wide and deep transversal grooves provide road holding and traction on slippery surface.
- Robust shoulder design ensures resistance to tears and lacerations.
- High wear-resistant formula enhances wear resistance and ensure longer span life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11.00R20	18	J	152/149	K	68	20.7	16.4	8.0	7830	135	3550	930	7160	135	3250	930
12.00R20	22	M	158/155 (156/153)	J(K)	62	21.9	17.4	8.5	9370	140	4250	970	8540	140	3875	970
215/75R17.5	16	H	135/133	J	62	17.1	13.6	6.00	4805	125	2180	865	4540	125	2060	865
235/75R17.5	18	J	143/141	J	62	15.2	12.1	6.75	6005	125	2425	865	5675	125	2575	865
275/80R22.5	18	J	149/146	M	81	21.9	17.4	8.25	7160	123	3250	850	6610	123	3000	850

SUPER LD9





- Block pattern design for good traction and braking power.




- The design of bouncing stones at the bottom of the tread grooves prevents the bottom of the tread grooves from being punctured by stones, which effectively enhances the service life of the tires.



- Open shoulder pattern design facilitates stone removal while still providing great traction.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	16	H	146/143	L	75	29.0	23.0	8.25	6610	120	3000	830	6005	120	2725	830
11R24.5	16	H	149/146	L	75	29.0	23.0	8.25	7160	120	3250	830	6610	120	3000	830
11R24.5	18	J	152/149	L	75	29.0	23.0	8.25	7830	135	3550	930	7160	135	3250	930
295/75R22.5	16	H	142/143	M	81	28.9	23.0	9.00	6610	120	3000	830	6005	120	2725	830
295/75R22.5	18	J	149/146	L	75	28.9	23.0	9.00	7160	135	3250	930	6610	135	3000	930

SUPER LD23





- Increased tread width and groove depth enhance longer mileage.
- Asymmetrical block pattern design offers excellent driving force, less skidding and safer driving.
- Robust shoulder blocks optimized sectional traversal grooves ensure low rolling resistance.
- Special open shoulder design provides outstanding traction and promotes even wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/60R22.5	18	J	150/147 (149/146)	K(L)	68	21.9	17.4	9.00	7390	130	3350	900	6780	130	3075	900
315/60R22.5	18	J	152/148	L	75	22.6	17.9	9.00	7830	130	3550	900	6940	130	3150	900

SUPER LD26





- Dual compound tread promotes low rolling resistance for excellent fuel economy and long casing life.
- Connective strengthen bars control movement of the tread blocks for low rolling resistance and optimal even wear.
- Groove bottom protectors help prevent stone drilling that ensuring better durability.
- Closed shoulder design fights irregular wear for optimal even wear and higher mileage.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	16	H	146/143	L	75	25.7	20.4	8.25	6610	120	3000	830	6005	120	2725	830
11R24.5	16	H	149/146	L	75	25.7	20.4	8.25	7160	120	3250	830	6610	120	3000	830

SUPER LD25





- Hybrid pattern design with closed shoulder ensures excellent driving performance.
- Four vertical lines pattern and ladder-shaped trenchwall design with special rubber formula provides better tire heat dissipation performance.
- Large angle trench wall can effectively prevent the tread groove cracks.
- Cut and chip resistant compound makes the tire more durable and longer tire life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	16	H	146/143	L	75	24.4	19.4	8.25	6610	120	3000	830	6005	120	2725	830
385/65R22.5	20	L	160	J	62	20.7	16.4	11.75	9920	130	4500	900	—	—	—	—
425/65R22.5	20	L	165	J	62	20.7	16.4	13.00	11350	120	5150	825	—	—	—	—

SUPER LD117





- Long-distance wear-resistant formula design and application, suitable for all seasons.
- Extra-wide tread helps provide stability while helping to improve handling and mileage.
- Full 28/32nds tread depth helps provide long original tread life.
- Wide, open shoulder grooves help deliver additional traction balanced with tread life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	16	H	146/143	L	75	28.3	22.5	8.25	6610	120	3000	830	6605	120	2725	830

SUPER LT1



- Wide footprint tread design promotes mileage.
- Optimized zig-zag central grooves promote steering precision and provide strong handling ability on both wet and dry roads.
- Lateral grooves with built-in stone ejectors prevent stone trapping and enhance tear resistance, thus extending the lifespan of tires.
- Widened tread shoulder design reduces rubber movement ensuring optimal even wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
385/65R22.5	24	N	164(162)	J (K)	62	21.4	17	11.75	11000	138	5000	950	——	——	——	——
385/55R22.5	24	N	164(162)	J (K)	62	19.5	15.5	12.25	11000	138	5000	950	——	——	——	——

SUPER LT258



- The distinctive shoulder tread design provides for proper distribution of footprint contact pressure, resulting in excellent wear resistance and enhanced mileage.
- Superior durability and excellent impact resistance are ensured by the reinforced sidewall's increased thickness and unique compound.
- Sturdy longitudinal ribs provide precise steering, road gripping, wet grip, and a reduced halting distance.
- Outstanding grip and great mileage are provided by an optimized tire formula and innovative functional sipes.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12R22.5	18	J	152/149	L	75	21.3	16.9	9.00	7830	135	3500	930	7160	135	3250	930

SUPER LT288



- Robust longitudinal ribs grant wet grip,road holding and steering precision, shorter braking distance.
- Special functional sipes provide excellent grip and high mileage.
- The special shoulder tread contour allows a correct distribution of footprint contact pressure and ensures optimal even wear and higher mileage.
- Reinforced sidewall with higher thickness and special compound ensures high impact resistanceand durability.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
295/60R22.5	18	J	150/147	K	68	18.4	14.6	9.00	7390	130	3350	900	6780	130	3075	900
315/60R22.5	20	L	153/150	L	75	18.4	14.6	9.75	8050	130	3650	900	7390	130	3350	900

SURPASS MAE8



- Longitudinal straight groove and zigzag groove are designed together, taking into account braking and fuel-saving performance, effectively reducing braking distance and saving fuel costs
- Groove bottom protectors help prevent stone drilling than ensuring better durability.
- The small pattern steel sheet design on tire shoulder can effectively improve the tire's skid resistance and make driving safer.
- Unique tread compound design for longer mileage.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R24	20	L	160/157	K	68	18.3	14.5	8.5	9920	130	4500	900	9090	130	4125	900


URBAN BUS




URBAN BUS

SUPER UA82






- Four longitudinal grooves design provides good handling performance.



- Optimized sipes design provides better wet skid resistance.
- Special tread wear-resistant formula design to ensure longer service life.




- Strengthen carcass steel wire design, for safe use.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
215/75R17.5	18	J	135/133	J	62	17.1	13.6	6.00	4805	123	2180	850	4540	123	2060	850
235/75R17.5	18	J	143/141	J	62	17.1	13.6	6.75	6005	127	2725	875	5675	127	2575	875

SUPER UA89





- Wider contact area and enhanced stability -ideal for minibuses and rough road conditions.



- High wear resistance and long mileage -perfect for poor road surfaces and daily heavy use.
- Reinforced shoulder design-excellent load-bearing and prevents irregular wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
215/75R17.5	18	J	135/133	J	62	18.9	15.0	6.00	4805	123	2180	850	4540	123	2060	850
235/75R17.5	18	J	143/141	J	62	18.3	14.5	6.75	6005	127	2725	875	5675	127	2575	875
295/80R22.5	20	L	154/149	J	62	25.2	20.0	9.00	8270	123	3750	850	7160	123	3250	850





SUPER MA1



- Unique tread formula effectively improves puncture resistance.
- The grip angle of the tire reduces rolling resistance for improved fuel economy.
- The special groove design ensures driving stability and improves self-cleaning capabilities.
- The strengthened shoulder ribs and protrusions within the grooves improve scratch resistance and uniform wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
10.00R20	18	J	149/146	J	62	22.6	17.9	7.50	7160	135	3250	930	6610	135	3000	930
12.00R20	22	M	158/155 (156/153)	F (J)	50	22.6	17.9	8.50	9370	140	4250	970	8540	140	3875	970

SUPER MA26



- Good passing performance,anti-slip and semi-drive performance.
- Excellent groove self-cleaning performance, puncture-resistant and stone-resistant tread.
- Semi-open shoulder design reduces heat generation and shoulder voiding.
- The tread has good wear resistance and long service life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	18	J	149/146	L	75	20.0	15.9	8.25	7160	135	3250	930	6610	135	3000	930
11R24.5	18	J	152/149	K	68	20.8	16.5	8.25	7830	135	3550	930	7160	135	3250	930



SUPER MA3



- 10% wider tread combined with deeper grooves improves contact area and promotes even wear, delivering longer mileage.
- Zigzag groove design enhances traction and braking stability on complex and mixed road conditions.
- Optimized tread angles with integrated stone ejectors effectively prevent stone trapping and punctures, ensuring reliable durability.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	18	J	149/146	K	68	24.6	19.5	8.25	7160	135	3250	930	6610	135	3000	930
11R24.5	18	J	152/149	K	68	24.6	19.5	8.25	7830	135	3550	930	7160	135	3250	930
13R22.5	20	L	156/150	K	68	22.7	18.0	9.75	8820	127	4000	875	7390	127	3350	875

SUPER MA31



- Good passing performance and anti-skid capabilities, with reliable semi-driving performance.
- Excellent self-cleaning pattern grooves, offering strong resistance to punctures and stone retention.
- Semi-open shoulder design effectively reduces heat generation and minimizes shoulder space stress.
- Durable tread design with excellent wear resistance, ensuring a long service life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R20	18	L	157/154	K	68	18.4	14.6	8.50	8270	120	3750	830	7160	120	3450	830
11R22.5	16	H	148/145	K	68	18.4	14.6	8.25	6940	123	3150	850	6395	123	2900	850
11R24.5	16	H	149/146	K	68	18.4	14.6	8.25	7160	120	3250	830	6610	120	3000	830

SUPER MA32



- Wide tread cap with reinforced carcass and bead structure design provides tires with outstanding durability.
- Big block pattern design provides high road holding and traction.
- Robust shoulder blocks ensure resistance to tears and lacerations.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
7.00R16LT	14	G	118/114	M	81	15.2	12.1	5.50F	2910	112	1320	770	2600	112	1180	770
7.00R16LT	14	G	122/118	L	75	17.8	14.1	6.00G	3305	112	1500	770	2910	112	1320	770
7.50R16LT	16	H	125/121	L	75	17.8	14.1	6.00G	3640	126	1650	870	3195	126	1450	870
8.25R16LT	16	H	128/124	K	68	18.4	14.6	6.50H	3970	112	1800	770	3525	112	1600	770
8.25R20	16	H	139/137	K	68	19.7	15.6	6.50	5355	135	2430	930	5070	135	2300	930
9.00R20	16	H	144/142	K	68	20	15.9	7.00	6175	130	2800	900	5850	130	2650	900
12.00R24	20	L	160/157	K	68	20	15.9	8.50	9920	130	4500	900	9090	130	4125	900
12.00R20	20	L	156/153	K	68	21.3	16.9	8.50	8820	130	4000	900	8050	130	3650	900
325/95R24	22	M	162/160	K	68	20	15.9	9.00	10500	120	4750	830	9920	120	4000	830

SUPER MA321



- Optimized cap profile and durable tread compound provide excellent mileage.
- The angled tread blocks deliver excellent traction.
- Large deep shoulder groove improves traction and helps the tire run cool.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12R22.5	18	J	152/149	L	75	20.0	15.9	9.00	7830	135	3550	930	7160	135	3250	930
295/80R22.5	20	L	154/149	K	68	20.7	15.9/16.4	9.00	8270	123	3750	850	7160	123	3250	850
315/80R22.5	20	L	157/154	K	68	21.9	16.9/17.4	9.00	9090	130	4125	900	8270	130	3750	900



SUPER MA321++





- Optimized cap profile and durable tread compound provide excellent mileage.
- The angled tread blocks deliver excellent traction.
- Large deep shoulder groove improves traction and helps the tire run cool.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R20	24	N	160/157	F	50	21.0	16.9	8.50	9920	140	4500	970	9090	140	4125	970

SUPER MA358





- The special pattern design provides excellent driving and grip on the compound surface.
- Wider tread design makes tires more durable.
- Transverse wave groove design provides the outstanding loading capacity of tires.
- The new formulation ensures the adaptability of the tires in various pavement environments.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R24	20	L	160/157	K	68	19.7	15.6	8.50	9920	130	4500	900	9090	130	4125	900
325/95R24-22	22	M	162/160	K	68	20.0	15.9	9.00	10500	120	4750	830	9920	120	4500	830

SUPER MA5





- Optimized multi-directional tread design delivers reliable traction on wet, mixed, and soft surfaces.
- Wider tread and aggressive pattern improve weight distribution, flotation, and grip on soil and mud.
- Reinforced compound with deep tread and thick sidewall enhances cut resistance, durability, and retreadability.
- Wide, deep grooves ensure consistent wet performance throughout the tire's service life while reducing cost per kilometer.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
385/65R22.5	24	N	164	K	68	22.7	18.0	11.75	11000	130	5000	900	—	—	—	—
425/65R22.5	24	N	165	K	68	22.7	18.0	12.25	11000	130	5000	900	—	—	—	—
445/65R22.5	24	N	169	K	68	22.7	18.0	13.00	12800	130	5800	900	—	—	—	—

SUPER MD2





- Increased tread width and groove depth design for on and off road services, features high resistance to laceration, high traction on rough terrains and mud, mileage and acoustic comfort on asphalted road.
- Great Wall shaped edges design enhances grip for slippery surfaces.
- Continuous stone ejectors fight stone retention and drilling to preserving the casing, thus ensuring high durability performance.
- House shaped blocks shoulder design grants excellent lateral grip in slippery conditions.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	16	H	146/143	L	75	32.0	25.4	8.25	6610	120	3000	830	6005	120	2725	830
11R24.5	16	H	149/146	L	75	32.0	25.4	8.25	7160	120	3250	830	6610	120	3000	830



SUPER MD9





- Directional mixed pattern design provides extremely good traction.
- Wide and deep transversal grooves provide better road holding and traction on slippery surfaces.
- Open shoulder structure effectively disperses heat.
- Cut and chip resistant compound makes the tire more durable and longer tire life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
225/80R17.5	16	H	123/122	L	75	21.4	17.0	6.75	3415	102	1550	700	3305	102	1500	700

SUPER MD301





- Increased tread width promotes mileage.
- Directional tread pattern for better tration, acoustic comfort and even wear.
- Reinforced sidewall with higher thickness and special compound ensures high impact resistance and durability.
- Special tread compound formulation to provide resistance to aggressions and abrasion.


Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12R22.5	18	J	152/149	K	68	23.9	19.0	9.00	7830	135	3550	930	7160	135	3250	930
315/80R22.5	22	M	160/157 (157/154)	J(K)	62	27.3	21.7	9.00	9920	138	4500	950	9090	138	4125	950

SUPER MD818





- The directional pattern combined with the deep groove design can effectively improve the driving force and traction performance of the tire.



- The large-angle groove wall design can effectively prevent stones from being trapped in the groove, avoid cracks at the bottom of the groove, and further increase the service life of the tire.



- The reinforced skeleton material ensures the superior load-carrying performance of theproduct and makes driving safer.
- Special tread formula design, strong puncture resistance.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
13R22.5	20	L	156/150	K	68	27.7	22.0	9.75	8820	125	4000	860	7390	125	3350	860
235/75R17.5	18	J	143/141	J	62	18.0	15.0	6.75	6005	127	2725	875	5675	127	2575	875
295/80R22.5	20	L	154/149	K	68	25.2	20.0	9.00	8270	123	3750	850	7160	123	3250	850
315/80R22.5	22	M	160/157 (157/154)	J(K)	62	29.0	22.6	9.00	9920	138	4500	950	9090	138	4125	950



SUPER MD306



- The reinforced bead design enhances the tire's overload capacity, making it easier for the tires to adapt to various operating conditions.
- The mixed pattern with cross grooves delivers superior traction and anti-slip performance.
- The tread groove bottom boss design prevents stones from being trapped and effectively reduces the risk of groove cracking.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11.00R20	18	J	152/149	J	62	22.5	17.9	8.00	7830	135	3550	930	7160	135	3250	930
12R22.5	20	L	156/153	J	62	22.6	17.9	9.00	8820	135	4000	930	8050	135	3650	930

SUPER MD309



- The reinforced bead design enhances the tire's overload capacity, making it easier for the tires to adapt to various operating conditions.
- The mixed pattern with cross grooves delivers superior traction and anti-slip performance.
- The tread groove bottom boss design prevents stones from being trapped and effectively reduces the risk of groove cracking.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R20	24	N	160/157	J	100	22.0	17.4	8.50	9920	140	4500	970	9090	140	4125	970

SUPER MD307



- Increased tread width promotes long service life.
- Directional tread pattern for better traction, acoustic comfort and even wear.
- Reinforced sidewall with higher thickness and special compound ensures high impact resistanceand durability.
- Special tread compound formulation to provide resistance to aggressions and abrasion.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R20	24	N	160/157	J	100	25.0	19.9	8.50	9920	140	4500	970	9090	140	4125	970

SUPER MD363



- The aggressive multi-lug design provides exceptional off-road traction.
- The deep tread depth offers a longer tread life and exceptional fuel efficiency.
- Open shoulder design delivers superior stability and uniform wear.
- The enhanced rubber compound improves cut and chunking resistance.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R20	20	L	156/153	J	62	22.6	17.9	8.50	8820	130	4000	900	8050	130	3650	900
12.00R24	20	L	160/157	K	68	22.7	18	8.50	9920	130	4500	900	9090	130	4125	900
295/80R22.5	20	L	154/149	G	56	27.0	21.4	9.00	8270	123	3750	850	7160	123	3250	850



SUPER MD318





- Bulk zigzag transverse pattern design provides excellent driving and gripping force for tires on composite pavement.
- Reasonable balanced contour design with special formula design makes the tire more durable and longer mileage.
- The design of tread groove bottom boss can prevent grit groove from clamping stone, and can effectively prevent tread groove crack.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11.00R20	18	J	152/149	J	62	22.6	17.9	8.00	7830	135	3550	930	7160	135	3250	930

SUPER MD668





- Increased under tread to reduce the possibility of accidental casing damage.
- Wide and deep transversal grooves provide better road holding and traction on slippery surfaces.
- Robust shoulder blocks, massive central rib and optimized sectional transversal grooves ensure resistance to tears and lacerations.
- Cut and chip resistant compound makes the tire more durable and longer tire life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
9.5R17.5	18	J	143/141	J	62	20.0	15.9	6.75	6005	127	2725	875	5675	127	2575	875

SURPASS MRY2





- Chamfered tread block design to reduce tread tearing.
- Angled grooves reduce tread tearing when driving over obstacles.
- Compact central tread blocks to improve resistance to tread tearing.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
13R22.5	18	J	156/150	K	68	27.7	22	9.75	8820	125	4000	860	7390	125	3350	860

SURPASS MRY8





- Lateral big block pattern design provides strong driving force and grip.
- The stone ejector design at the bottom of the grooves protects from being punctured and effectively improves the service life of the tire.
- The shoulder rib design prevents twist of shoulder during driving, improves tire life.
- Puncture-resistant formula for strong applicability to different road conditions.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R24	20	L	160/157	K	68	22.7	18.0	8.50	9920	130	4500	900	9090	130	4125	900

SUPER MIX D8







- Big block design provides better traction and even wear.



- Reinforced sidewall with higher thickness ensures high impact resistance and durability.
- Special tread compound formulation provides resistance to aggressions and abrasion.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R20	22	M	158/155 (156/153)	F(J)	62	25.2	20	8.5	9370	140	4250	970	8540	140	3875	970

SUPER MD6++







- Unique block drive wheel tread design provides strong driving force and grip.




- Open shoulder design, high heat dispersion efficiency of the grooves, which enhances the driving performance of the tire.
- Adopt a new high wear resistant and low heat generation formula design to ensure the excellent endurance performance.
- The new carcass steel wire material is used to ensure the bearing capacity of the tire and make it safer to use.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
12.00R20	24	N	160/157	D	40	27.0	21.4	8.5	9920	140	4500	970	9090	140	4125	970


WINTER

SUPER WD2






- Directional tread design enhances snow and ice traction.



- 3D siping design for excellent stability and powerful traction in dry and slippery conditions.



- Open shoulder design effectively drain water and improves grip.
- Special compound formulation to provide resistance at low temperature.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R24.5	16	H	149/146	M	81	28.3	22.5	8.25	7160	120	3250	830	6610	120	3000	830

SUPER WD7






- 3 dimensional siping technology helps provide exceptional traction on dry and slippery surfaces. Over 1,300 biting edges combine to help provide excellent levels of traction, the 3 dimensional sipeslock together for thestability normally associated with solid tread blocks.




- Extra-wide tread helps provide stability while helping to improve handling and mileage.
- Full 28/32nds tread depth helps provide long original tread life.



- Wide, open shoulder grooves help deliver additional traction balanced with tread life.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	16	H	146/143	L	75	28.3	22.5	8.25	6610	120	3000	830	6005	120	2725	830

OFF ROAD

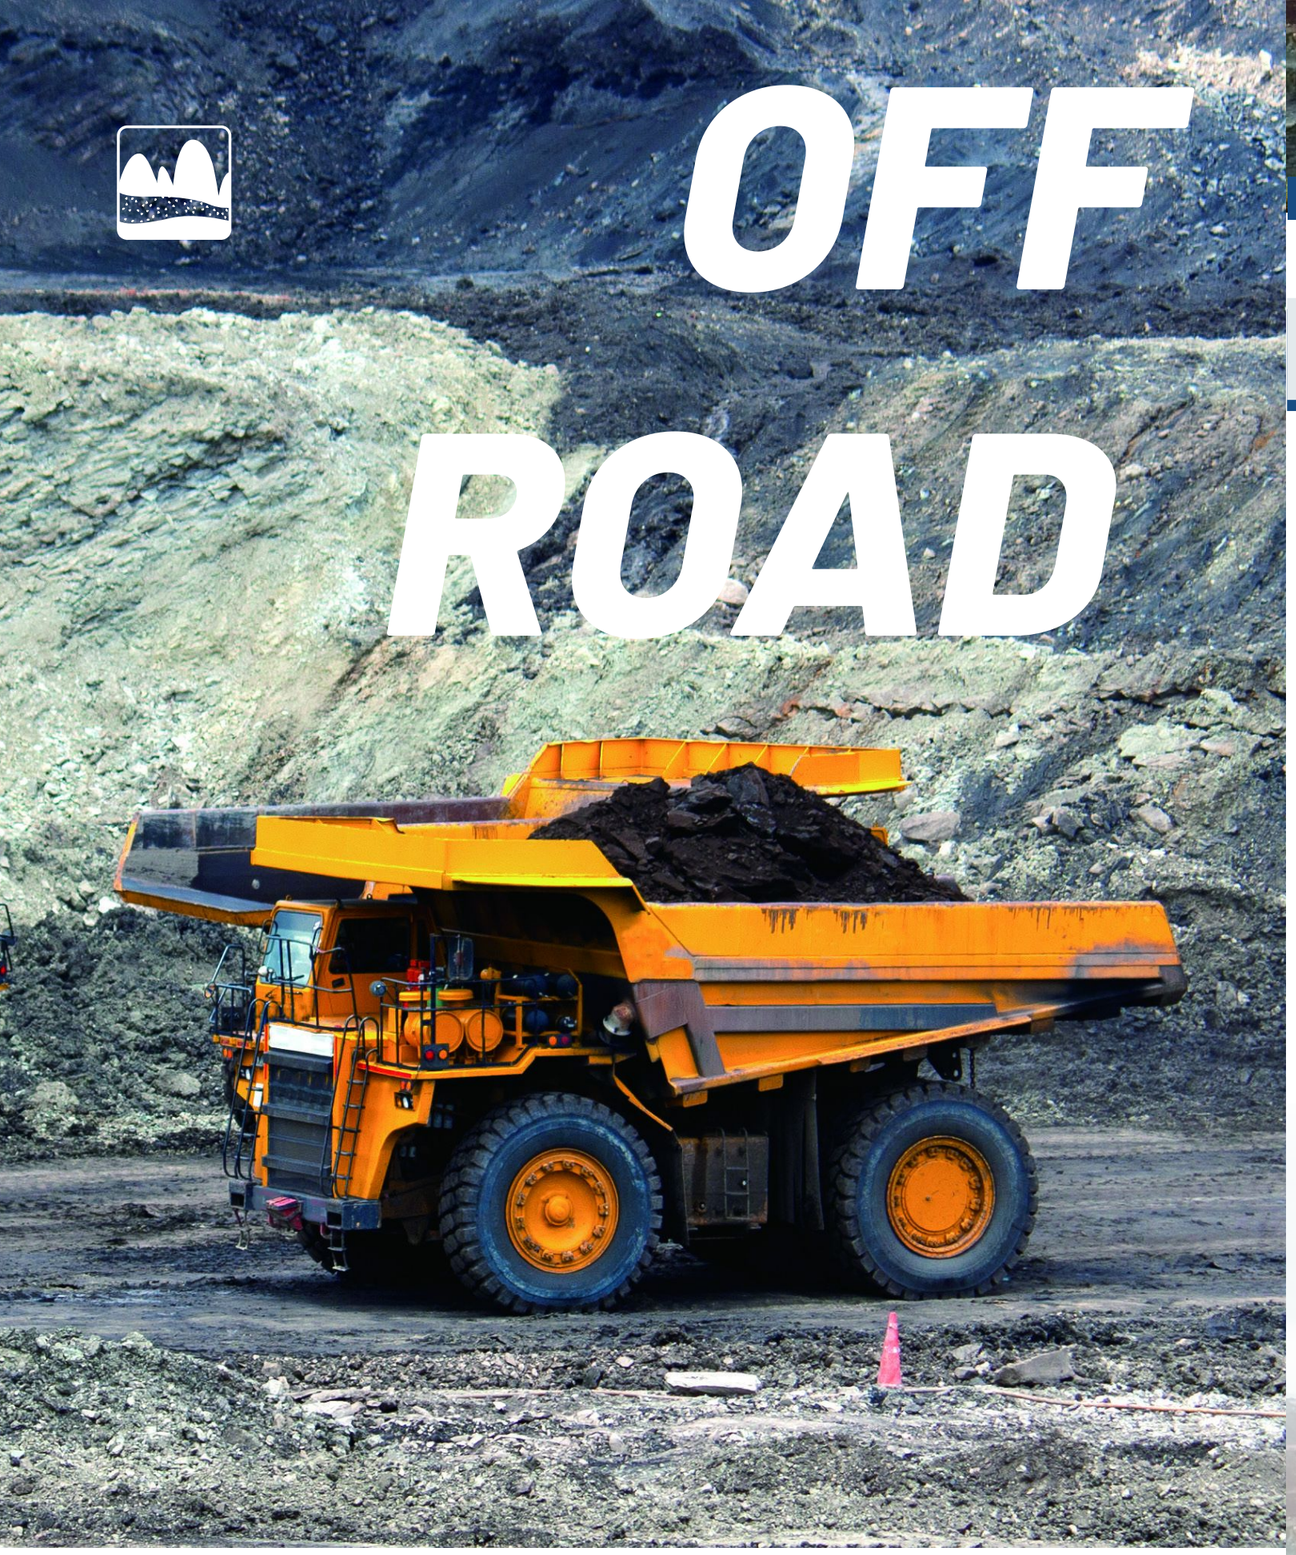

SUPER KD2



- The aggressive multi-lug tread design provides powerful grip and exceptional traction.



- Optimized groove design prevents stone trapping and grants highest mileage.



- Tough bar between blocks optimized to ease self-cleaning, thus ensuring better traction and even wear.
- Special tread compounds improve resistance to cuts, chips, tearing and irregular wear.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
225/80R17.5	16	H	123/122	J	62	22.7	18	6.75	3415	102	1550	700	3305	102	1500	700



SUPER KD3



- Big block pattern design provides excellent driving and griping performances.
- Reinforced carcass and bead design provide high quality and performance under heavy load conditions.
- Self-cleaning, open shoulder tread design help enhance traction and flotation capabilities on varied terrains.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
11R22.5	18	J	149/146	F	50	28.0	22.2	8.25	7160	135	3250	930	6610	135	3000	930
11R24.5	18	J	152/149	F	50	28.0	22.2	8.25	7830	135	3550	930	7160	135	3250	930
12R22.5	20	L	154/151	F	50	29.9	23.7	9.00	8270	140	3750	970	7610	140	3450	970
12.00R24	20	L	160/157	F	50	39.3	31.2	8.50	9920	130	4500	900	9090	130	4125	900
295/80R22.5	20	L	154/149	F	50	26.5	21.0	9.00	8270	123	3750	850	7160	123	3250	850

SUPER KD5



- Big block pattern design provides excellent driving and gripping performances
- Open shoulder design is conducive to providing reliable traction and grip in different terrains

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
315/80R22.5	22	M	160/157	F	50	31.4	25.0	9.00	9920	138	4500	950	9090	138	4125	950

SUPER KD65



- Wide and deep tread enables long wear life with stability and durability.
- Lateral grooves with wide angles design increase driving power and self-cleaning abilities.
- Extra thick sidewall design enhances cut and impact resistance.
- Reinforced carcass and bead deisgn provides high quality and performance under heavy load conditions.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
8.25R20	16	H	139/137	F	50	25.1	19.9	6.50	5355	135	2430	930	5070	135	2300	930
9.00R20	16	H	144/142	F	50	26.3	20.9	7.00	6175	130	2800	900	5840	130	2650	900
11.00R20	16	H	150/147	F	50	31.1	24.7	8.00	7390	120	3350	830	6780	100	3075	830
11.00R20	18	J	152/149	F	50	31.1	24.7	8.00	7830	135	3550	930	7160	135	3250	930
12.00R20	20	L	156/153	F	50	31.1	24.7	8.50	8820	130	4000	900	8050	130	3650	900

SUPER KD68




- Special tread formula design meets the requirements of complex road conditions in mining areas, resistant to pricking and not falling.
- Utilization of BEKAERT steel cord material enhances tire carcass strength, prevents tire blowouts, and ensures safer driving.
- Thickened sidewall design effectively prevents sidewall scratching and bursting.

Size	PR	Load Range	Load Index	Speed Rating	Max Speed mph	Tread Depth		Standard Rim	Max Tire Load Single				Max Tire Load Dual			
						32nds	mm		lbs.	psi.	kg.	kPa.	lbs.	psi.	kg.	kPa.
14.00R25	—	—	—	A2	7	33.6	26.7	10.00/2.0	—	—	10000	950	—	—	—	—
14.00R25	—	—	—	B	31	33.6	26.7	10.00/2.0	—	—	5800	700	—	—	—	—

EUROPEAN TYRE LABELLING

REGULATION (EC)NO 2020/740

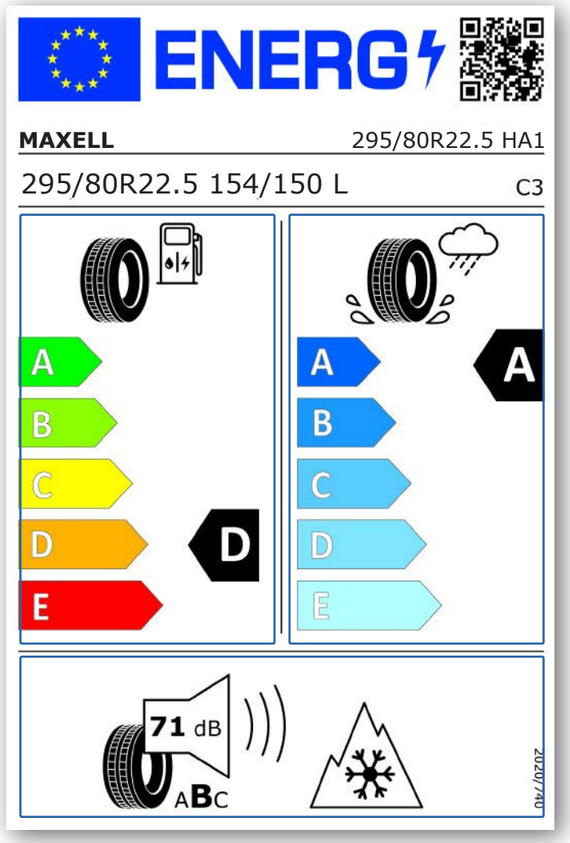

1 black sound wave
(=3dB already less than the future European limit)

2 black sound waves
(= already compliant with the future European limit)

3 black sound waves
(= compliant with the current European limit)

FUEL EFFICIENCY

Indicates fuel economy.

It is ranked from highest to lowest on a scale of A to G.

The fuel efficiency can be improved by up to **20%**.

WET GRIP

Indicates braking ability in wet conditions.

It is ranked from highest to lowest on a scale of A to G.

The braking distance can be shortened by up to **30%**.

EXTERIOR NOISE

Indicates the noise level outside the vehicle.

The level of noise is indicated by the number of sound wave lines.

The European Union is progressively raising noise standards to reduce noise pollution in the environment.

TECHNICAL TABLES LEGEND

(S) SECTION WIDTH (MM)


The linear distance between the outsides of the sidewalls of an inflated tyre excluding elevations due to labelling (marking), design application indicators, protective bands or ribs.

(H) SECTION HEIGHT (MM)

Half difference between the overall diameter and the nominal rim diameter.

(OD) OVERALL DIAMETER (MM)

The diameter of an inflated tyre at the outermost surface of the tread.

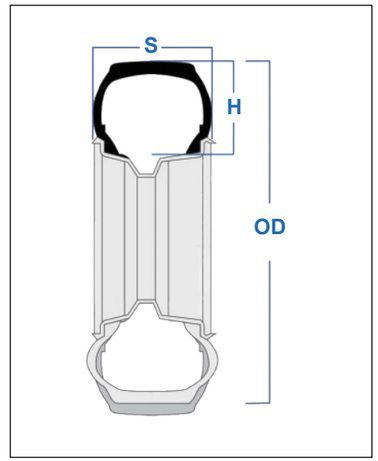

CONVERSION FACTORS

TO CONVERT FORM	INTO	MULTIPLY BY
mm inch	Inch mm	0.03937 25.4
Kg ibs	lbs kg	2.2046 0.4536
Bar Kg/cm2	Kg/cm2 bar	1.01972 0.98066
Bar lbs./sq.inch(psi)	lbs./sq.inch(psi) bar	14.5033 0.06895
bar	kpa	100
lbs./sq.inch(psi)	kpa	6.895
Bar lbs./sq.inch(psi)	lbs./sq.inch(psi) bar	0.62137 1.60935

SPEED SYMBOLS [KM/H&MPH]

SYMBOL	E	F	G	J	K	L	M
KM/H	70	80	90	100	110	120	130
M.P.H.	43	50	56	62	68	75	81